


## STANDARD FORMATS AVAILABLE FROM STOCK

| Width +<br>Open Gusset<br>x Height (mm) | Coextruded PPL film         |          |
|-----------------------------------------|-----------------------------|----------|
|                                         | Transparent or white bottom |          |
|                                         | thickness                   | pcs./box |
| 65 + 50 x 200                           | 40 μ                        | 3000     |
| 80 + 50 x 240                           | 40 μ                        | 2000     |
| 100 + 60 x 280                          | 40 μ                        | 1500     |
| 120 + 70 x 350                          | 40 μ                        | 1500     |
| 120 + 70 x 350                          | 50 μ                        | 1200     |
| 140 + 80 x 345                          | 40 μ                        | 1200     |
| 140 + 80 x 345                          | 50 μ                        | 1000     |

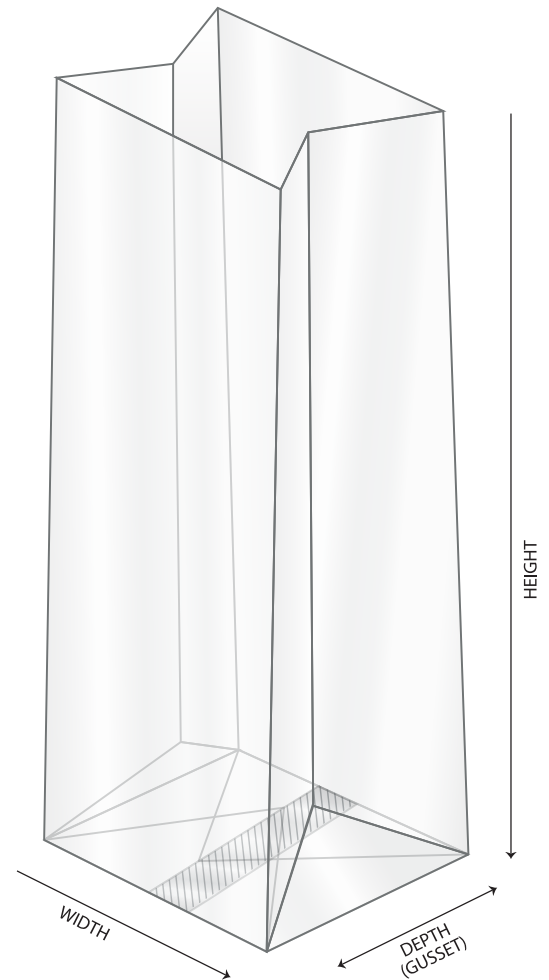

### PRINTING

Custom formats and printing up to 8-colour process.  
Minimum order quantity 30,000 pcs. per format.



### DISPATCH TIMES

Within 1 working week of order confirmation for standard formats available from stock.  
Within 8-10 working weeks from order confirmation for custom formats.  
Within 10-12 working weeks from approval of artwork for customised printing.



### PACKAGING

In 25 pc. Bundles. Each bundle is closed with a 50x25 mm adhesive label with EAN code, item format, production batch and food-safe symbol.



### PACKAGING IN STANDARD BOXES

In 60x40xH30 cm boxes, approx. 8-13 kg per box.  
Boxes of 500 pcs. and 1,000 pcs. possible on request (surcharge payable).  
Box label: anonymous (manufacturer not identified), 95x60 mm with EAN-128 code, item code, item description, production batch and food-safe symbol.



### PALLETS

Generally 4 boxes x 5 layers = 20 boxes per pallet.  
Pallet size: 80x120xH170 cm - approx. 240-300 kg.  
Stretch wrapped.

## Specifications of the films used by Eurocell

|                  | COEX PPL  | COATED PPL |
|------------------|-----------|------------|
| THICKNESS        | 40 - 50 μ | 40 - 50 μ  |
| CLARITY          | ●●○       | ●●●        |
| GLOSS            | ●●○       | ●●●        |
| RIGIDITY         | ●●○       | ●●●        |
| HUMIDITY BARRIER | ●●●       | ●●●        |
| OXYGEN BARRIER   | ●○○       | ●●○        |
| HEAT SEALABILITY | ●●●       | ●●●        |
| RECYCLABLE       |           |            |

●●● the best

## Maximum and minimum manufacturing sizes (in 5 mm increments)

| mm     | minimum | maximum |
|--------|---------|---------|
| width  | 65      | 140     |
| gusset | 50      | 90      |
| height | 200     | 350     |